

MARINE AIR RECEIVER

Horizontal Marine Air Receiver

B styleMarine Air Receiveris made up of steel body, end, manhole for easy examination and repiar set in end, inlet/outlet valve, safety valve.And bottle valve set up inlet/outlet valve, safety valve, pressure gauge and p...

ISO9001 Supplier

Class Certificate

Export Supply




Key Highlights

Category	Marine Air Receiver
Standard	EN
Material	Carbon Steel
Weight / Size	Mpa Inner Dia mm Height mm Weight kg B B0.63-1.0 0.63 1 700 1370 480 B0....
Certificate	CCS, BV, ABS, GL , LR, NK

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Marine Air Receiver	Model / SKU	Horizontal-Marine-Air-Receiver
Standard	EN	Material	Carbon Steel
Weight / Size	Mpa Inner Dia mm Height mm Weight kg B B0.63-1.0 0.63 1 700 1370 480 B0.80-1.0 0.8 700 1370 520 B1.00-1.0 1 800 1490 685 B0.63-3.0 0.63 3 700 1470 680 B0.80-3.0 0.8 700 1470 780 B1.00-3.0 1 800 1580 950 B1.60-3.0 1.6 900 1680 1180 B2.50-3.0 2.5 1100 1940 1925 B4.00-3.0 4 1200 2040 3400 B4.50-3.0 4.5 1200 2040 3750 B5.00-3.0 5 1200 2040 4100 B6.30-3.0 6.3 1400 2265 4230 B8.00-3.0 8 1500 2365 4930 B10.00-3.0 10 1600 2505 6785 B12.00-3.0 12 1700 2695 7500 B14.00-3.0 14 1800 2750 8770 B16.00-3.0 16 2000 3070 11000	Certificate	CCS, BV, ABS, GL , LR, NK
Warranty	12 Months unless specified otherwise	Origin	China

China Horizontal Marine Air Receiver:

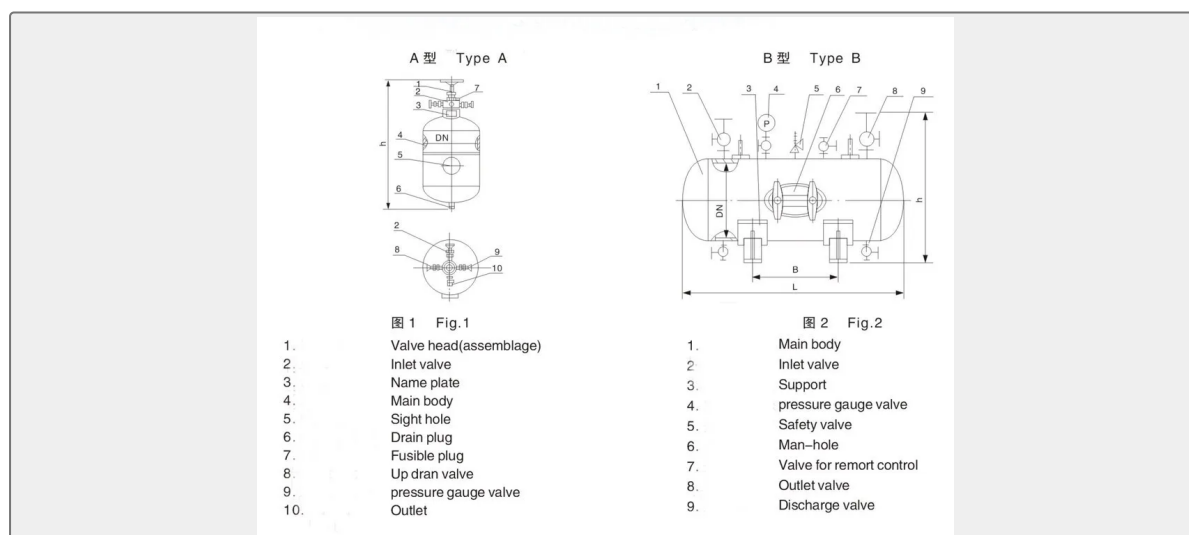

B style Marine Air Receiver is made up of steel body, end, manhole for easy examination and repair set in end, inlet/outlet valve, safety valve. And bottle valve set up inlet/outlet valve, safety valve, pressure gauge and pressure gauge valve, drain valve, etc.

Main Specification:

Style	Type	Capacity(m3)	W.P. Mpa	Inner Dia mm	Height mm	Weight kg
-------	------	--------------	----------	--------------	-----------	-----------

B	B0.63-1.0	0.63	1	700	1370	480
	B0.80-1.0	0.8		700	1370	520
	B1.00-1.0	1		800	1490	685
	B0.63-3.0	0.63	3	700	1470	680
	B0.80-3.0	0.8		700	1470	780
	B1.00-3.0	1		800	1580	950
	B1.60-3.0	1.6		900	1680	1180
	B2.50-3.0	2.5		1100	1940	1925
	B4.00-3.0	4		1200	2040	3400
	B4.50-3.0	4.5		1200	2040	3750
	B5.00-3.0	5		1200	2040	4100
	B6.30-3.0	6.3		1400	2265	4230
	B8.00-3.0	8		1500	2365	4930
	B10.00-3.0	10		1600	2505	6785
	B12.00-3.0	12		1700	2695	7500
	B14.00-3.0	14		1800	2750	8770
	B16.00-3.0	16		2000	3070	11000