

## JIS MARINE QUICK CLOSING VALVE

## Marine Cast Steel Emergency Shut-Off Valve JIS F7399 10K

ISO9001 Supplier

Class Certificate

Export Supply

Marine Emergency Shut-Off Valve is also called as Marine Quick Closing Valve. It is used to shut off the fuel oil pipeline in emergency. It can controlled by lever or the air cylinder.

Material can be cast steel, bronze...



### Key Highlights

Category	JIS Marine Quick Closing Valve
Standard	JIS
Material	Cast Steel, Nodular Iron
Weight / Size	JIS 7400-1996 Hydraulic Test Pressure:Body- 0.7Mpa, Seat-0.2Mpa,Seal for...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


### Technical Specifications

Category	JIS Marine Quick Closing Valve	Model / SKU	Marine-Cast-Steel-Emergency-Shut-Off-Valve-JIS-F7399-10K
Standard	JIS	Material	Cast Steel, Nodular Iron
Weight / Size	JIS 7400-1996 Hydraulic Test Pressure:Body- 0.7Mpa, Seat-0.2Mpa,Seal for quick closing-0.1Mpa Flange size as per JIS B2220 - 10K Main Material:	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA
Warranty	12 Months unless specified otherwise	Origin	China

#### CONTENTS

- China Marine Cast Steel Emergency Shut-Off Valve JIS F7399 10K:
- Main Material:
- Main Size List(mm):

## China Marine Cast Steel Emergency Shut-Off Valve JIS F7399 10K:

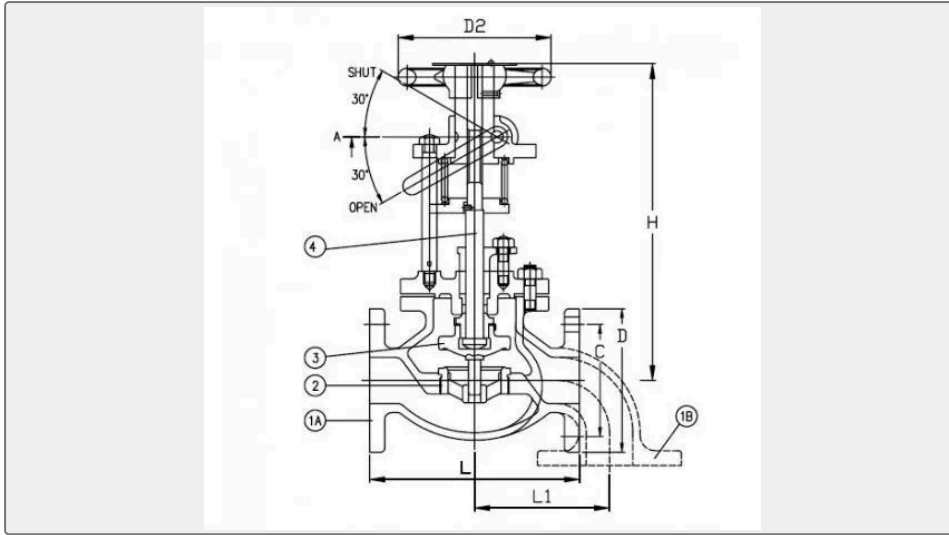

Marine Emergency Shut-Off Valve is also called as Marine Quick Closing Valve. It is used to shut off the fuel oil pipeline in emergency. It can controlled by lever or the air cylinder. Material can be cast steel, bronze, nodular iron.

Operation type: Manual (Lever) or Pneumatically operated

Design Standard: JIS F7399-1996

Test Standard: JIS 7400-1996

Hydraulic Test Pressure: Body- 0.7Mpa, Seat-0.2Mpa, Seal for quick closing-0.1Mpa

Flange size as per JIS B2220 - 10K

### Main Material:

Body: Cast Steel

Bonnet: Cast Steel

Seat: Brass

Disc: Brass

Stem: Brass

Operation Spindle: SUS403

Operation Lever: SUS403

Handwheel: FC200 (Cast iron)

### Main Size List(mm):

DN	L	D	C	No of bolt hole	bolt hole diameter	flange thickness	H	D2
40	170	140	105	4	19	16	310	140
50	220	155	120	4	19	16	335	160
65	270	175	140	4	18	18	395	180
80	300	185	150	8	19	18	420	180

100	350	210	175	8	20	18	510	224
125	420	250	210	8	19	20	440	250
150	490	280	240	8	19	22	520	320