

LIFEBOAT AND RESCUE BOAT ACCESSORIES


SCG025 Boat Reverse Gearbox

SCG025 Boat Reversing Gearbox are servo-automtically controlled helical gear transmission developed for use in pleasure craft and commercial craft,the servo-operated multiple-disc clutch requires only minimum effort for ...

ISO9001 Supplier

Class Certificate

Export Supply

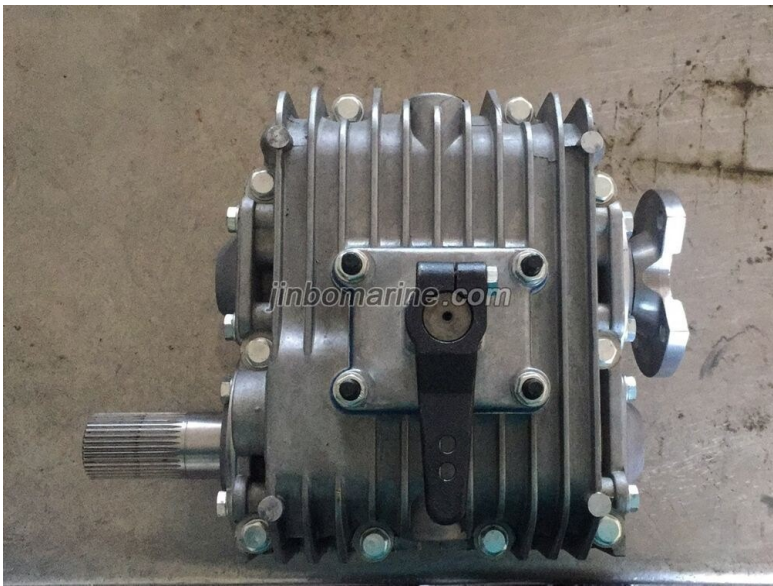

Key Highlights

Category	Lifeboat And Rescue Boat Accessories
Standard	DIN
Weight / Size	Technical Data SCG025-1 SCG025-2 SCG025-3 Forward gear 'A' Ratio i 1.54 ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Lifeboat And Rescue Boat Accessories	Model / SKU	SCG025-Boat-Reverse-Gearbox
Standard	DIN	Weight / Size	Technical Data SCG025-1 SCG025-2 SCG025-3 Forward gear 'A' Ratio i 1.54 1.88 2.74 Forward gear 'A' Ratio i 2.67 2.67 2.67 Input torque Mmax pleasure craft Nm 200 200 140 Commercial Craft Nw 150 150 110 Power Input Mmax pleasure craft Nm 55 Commercial Craft Nw 40.8 Input speed Nmax r/min 4000 Propeller thrust Fmax N 4000 Weigth without oil Kg 18.5 Oil quantity L 0.75 Oil grade:Automatic transmission fluid(ATF)
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China SCG025 Boat Reverse Gearbox:

SCG025 Boat Reversing Gearbox are servo-automtically controlled helical gear transmission developed for use in pleasure craft and commercial craft,the servo-operated multiple-disc clutch requires only minimum effort for gear changing,making the SCG transmission suitable for single-lever remote control via a rod linkage or bowden cable.

The torque transmission capacity of the clutch is exactly rated. Preventing shock loods from exceeding a predetermined value to ensure maximum protection of the engine and thus providing the effect of a safety clutch.

Technical Data		SCG025-1	SCG025-2	SCG025-3
Forward gear 'A' Ratio	i	1.54	1.88	2.74
Forward gear 'A' Ratio	i	2.67	2.67	2.67
Input torque Mmax	pleasure craft Nm	200	200	140
	Commercial Craft Nw	150	150	110
Power Input Mmax	pleasure craft Nm	55		
	Commercial Craft Nw	40.8		
Input speed Nmax	r/min	4000		
Propeller thrust Fmax	N	4000		
Weigth without oil	Kg	18.5		
Oil quantity	L	0.75		
Oil grade:Automatic transmission fluid(ATF)				

