SHACKLE

US Secutity Dee Shackles G2150, CSXK04BB

SIZE WLL A B C D E F G H K L M ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights


Category	Shackle
Material	Stainless steel
Weight / Size	SIZE WLL A B C D E F G H K L M N P R 3/16 1/3 0.38 0.25 0.88 0.19 0.60 0...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Shackle	**Model / SKU**	US-SECUTITY-DEE-SHACKLES-G2150-CSXK04BB
Material	Stainless steel	**Weight / Size**	SIZE WLL A B C D E F G H K L M N P R 3/16 1/3 0.38 0.25 0.88 0.19 0.60 0.56 —— 1.47 —— 0.98 —— 0.
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	**Warranty**	12 Months unless specified otherwise
Origin	China		

China US Secutity Dee Shackles G2150, CSXK04BB:

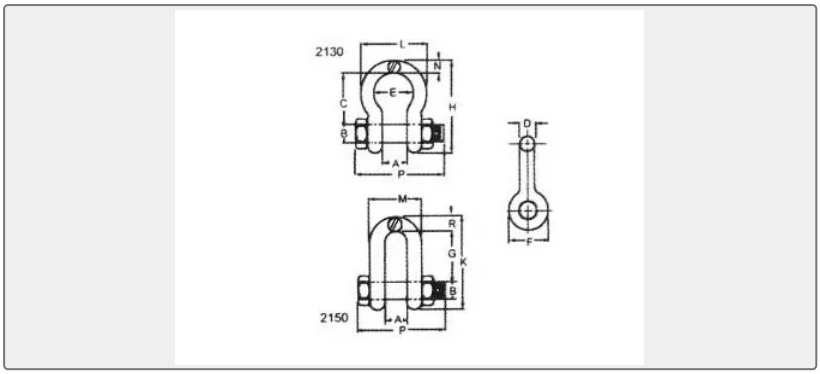

SIZE	WLL	A	B	C	D	E	F	G	H	K	L	M	N	P	R
3/16	1/3	0.38	0.25	0.88	0.19	0.60	0.56	——	1.47	——	0.98	——	0. 19	1.29	——
1/4	1/2	0.47	0.31	1.13	0.25	0.78	0.61	——	1.84	——	1.28	——	0.25	1.56	——
5/16	3/4	0.53	0.38	1.22	0.31	0.84	0.75	——	2.09	——	1.47	——	0.31	1.82	——
3/8	1	0.66	0.44	1.44	0.38	1.03	0.91	——	2.49	——	1.78	——	0.38	2.17	——
7/16	1-1/2	0.75	0.50	1.69	0.44	1.16	1.06	——	2.91	——	2.03	——	0.44	2.51	——
1/2	2	0.81	0.63	1.88	0.50	1.31	1.19	1.63	3.28	3.03	2.31	1.81	0.5	2.8	0.5
5/8	3-1/4	1.06	0.75	2.38	0.63	1.69	1.50	2.00	4.19	3.75	2.94	2.31	0.69	3.53	0.63
3/4	4-3/4	1.25	0.88	2.81	0.75	2.00	1.81	2.38	4.97	4.53	3.50	2.75	•81	4.07	0.81
7/8	6-1/2	1.44	1.00	3.31	0.88	2.28	2.09	2.81	5.83	5.33	4.03	3.19	0.97	4.71	0.97
1	8-1/2	1.69	1.13	3.75	1.00	2.69	2.38	3.19	6.56	5.94	4.96	3.69	1.06	5.31	1
1-1/8	9-1/2	1.81	1.25	4.25	1.13	2.91	2.69	3.58	7.47	6.78	5.16	4.06	1.25	5.09	1.25
1-1/4	12	2.03	1.38	4.69	1.25	3.25	3.00	3.94	8.25	7.50	5.75	4.53	1.38	6.51	1.38
1-3/8	13-1/2	2.25	1.50	5.25	1.38	3.63	3.31	4.38	9.16	8.28	6.38	5	1.5	7.21	1.5
1-1/2	17	2.38	1.63	5.75	1.50	3.88	3.63	4.81	10.00	9.05	6.88	5.38	1.62	7.73	1.62
1-3/4	25	2.88	2.00	7.00	1.75	5.00	4.19	5.75	12.34	10.97	8.86	6.38	2.25	9.05	2.12
2	35	3.25	2.25	7.75	2.00	5.75	4.85	6.75	13.68	12.28	9.97	7.25	2.4	10.41	2
2-1/2	55	4.13	2.75	10.50	2.62	7.25	5.69	8.00	17.84	14.84	12.87	9.38	3.13	13.56	2.62
3	85	5.00	3.25	13.00	3.00	7.88	6.50	8.50	21.50	16.88	14.36	11	3.62	16.5	3.5