

**SHACKLE**


# US Type Bolt Anchor Shackle G215

Similar Name US Type Screw Pin Chain Shackles G-215 US Type Bolt Chain Shackle G-215  
 US Type Straight Shackle G-215 US Type High Strength Shackle G-215 US Type Alloy Steel  
 Shackle G-215 ...

ISO9001 Supplier

Class Certificate

Export Supply

	Key Highlights	
	Category	Shackle
	Standard	EN
	Material	45# Steel and 40Cr Steel
	Weight / Size	Size Table Nominal Size(in) WLL (Tons) Dimension(in) Weight(lbs) A B C D...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	
<p>We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>		

Technical Specifications			
Category	Shackle	Model / SKU	US-Type-Bolt-Anchor-Shackle-G215
Standard	EN	Material	45# Steel and 40Cr Steel
Weight / Size	Size Table Nominal Size(in) WLL (Tons) Dimension(in) Weight(lbs) A B C D E F G K N G215/S215 1/4 1/2 0.47 0.31 0.25 0.25 0.97 0.62 0.91 1.59 1.34 0.13 5/16 3/4 0.53 0.38 0.31 0.31 1.15 0.75 1.07 1.91 1.63 0.18 3/8 1 0.66 0.44 0.38 0.38 1.42 0.92 1.28 2.31 1.86 0.29 7/16 1 1/2 0.75 0.5 0.44 0.44 1.63 1.06 1.48 2.67 2.13 0.38 1/2 2 0.81 0.63 0.5 0.5 1.81 1.18 1.66 3.03 2.38 0.71 5/8 3 1/4 1.06 0.75 0.63 0.63 2.32 1.5 2.04 3.76 2.91 1.5 3/4 4 3/4 1.25 0.88 0.81 0.75 2.75 1.81 2.4 4.53 3.44 2.32 7/8 6 1/2 1.44 1 0.97 0.88 3.2 2.1 2.86 5.33 3.81 3.49 1 8 1/2 1.69 1.13 1 1 3.69 2.38 3.24 5.94 4.53 5 1 1/8 9 1/2 1.81 1.25 1.25 1.13 4.07 2.68 3.61 6.78 5.13 6.97 1 1/4 12 2.03 1.38 1.38 1.25 4.53 3 3.97 7.5 5.5 9.75 1 3/8 13 1/2 2.25 1.5 1.5 1.38 5.01 3.31 4.43 8.28 6.13 13.25 1 1/2 17 2.38 1.63 1.62 1.5 5.38 3.62 4.87 9.05 6.5 17.25 1 3/4 25 2.88 2 2.12 1.75 6.38 4.19 5.82 10.97 7.75 29.46 2 35 3.25 2.25 2.36 2.1 7.25 5 6.82 12.74 8.75 45.75	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

<b>CONTENTS</b>	■ Similar Name	■ Main Specification
	■ Size Table	

## Similar Name

US Type Screw Pin Chain Shackles G-215

US Type Bolt Chain Shackle G-215

US Type Straight Shackle G-215


US Type High Strength Shackle G-215

US Type Alloy Steel Shackle G-215

## Main Specification

- U type body and a lateral pin.
- Drop Forged
- 45# Steel and 40Cr Steel
- Used in lifting or fasten cargo or machinery purpose.

## Size Table

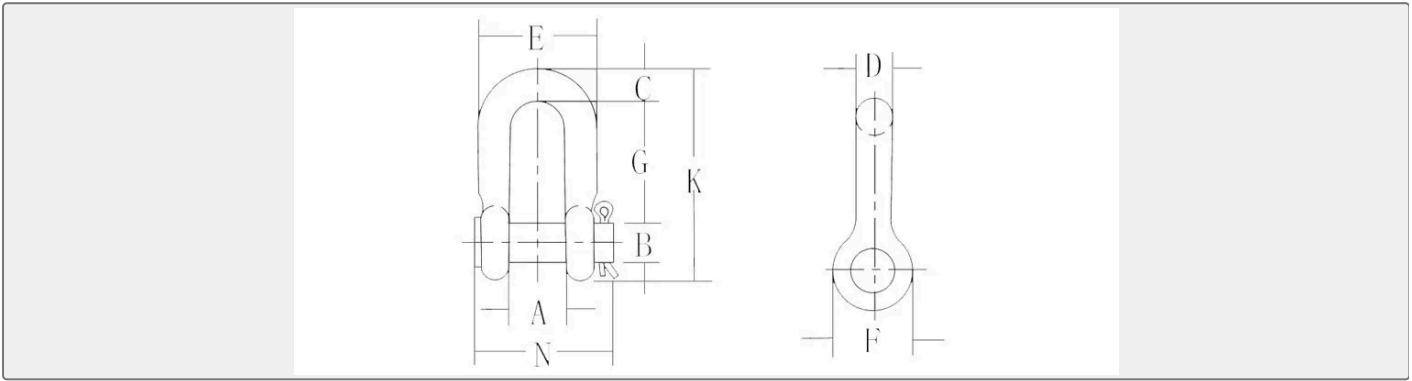

Nominal Size(in)	WLL (Tons)	Dimension(in)									Weight(lbs )	
		A	B	C	D	E	F	G	K	N		
1/4	1/2	0.47	0.31	0.25	0.25	0.97	0.62	0.91	1.59	1.34	G215/S215	0.13
5/16	3/4	0.53	0.38	0.31	0.31	1.15	0.75	1.07	1.91	1.63	5	0.18
3/8	1	0.66	0.44	0.38	0.38	1.42	0.92	1.28	2.31	1.86	5	0.29
7/16	1 1/2	0.75	0.5	0.44	0.44	1.63	1.06	1.48	2.67	2.13	5	0.38
1/2	2	0.81	0.63	0.5	0.5	1.81	1.18	1.66	3.03	2.38	5	0.71
5/8	3 1/4	1.06	0.75	0.63	0.63	2.32	1.5	2.04	3.76	2.91	5	1.5
3/4	4 3/4	1.25	0.88	0.81	0.75	2.75	1.81	2.4	4.53	3.44	5	2.32
7/8	6 1/2	1.44	1	0.97	0.88	3.2	2.1	2.86	5.33	3.81	5	3.49
1	8 1/2	1.69	1.13	1	1	3.69	2.38	3.24	5.94	4.53	5	5
1 1/8	9 1/2	1.81	1.25	1.25	1.13	4.07	2.68	3.61	6.78	5.13	5	6.97
1 1/4	12	2.03	1.38	1.38	1.25	4.53	3	3.97	7.5	5.5	5	9.75
1 3/8	13 1/2	2.25	1.5	1.5	1.38	5.01	3.31	4.43	8.28	6.13	5	13.25
1 1/2	17	2.38	1.63	1.62	1.5	5.38	3.62	4.87	9.05	6.5	5	17.25
1 3/4	25	2.88	2	2.12	1.75	6.38	4.19	5.82	10.97	7.75	5	29.46
2	35	3.25	2.25	2.36	2.1	7.25	5	6.82	12.74	8.75	5	45.75