

SHACKLE

US Type Bolt Chain Shackle G2150

Similar Name US Type Screw Pin Chain Shackles G-2150 US Type Bolt Chain Shackle G-2150 US Type Straight Shackle G-2150 US Type High Strength Shackle G-2150 US Type Alloy Steel Shackle G-2150...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Shackle
Standard	EN
Material	45# Steel and 40Cr Steel
Weight / Size	Size Table Nominal Size(in) WLL (Tons) Dimension(in) Weight(lbs) A B D F...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Shackle	Model / SKU	US-Type-Bolt-Chain-Shackle-G2150
Standard	EN	Material	45# Steel and 40Cr Steel
Weight / Size	Size Table Nominal Size(in) WLL (Tons) Dimension(in) Weight(lbs) A B D F G K M P R G-2150 1/4 1/2 0.47 0.31 0.25 0.62 0.91 1.59 0.97 1.56 0.25 0.13 5/16 3/4 0.53 0.38 0.31 0.75 1.07 1.91 1.15 1.82 0.31 0.23 3/8 1 0.66 0.44 0.38 0.92 1.28 2.31 1.42 2.17 0.38 0.33 7/16 1 1/2 0.75 0.5 0.44 1.06 1.48 2.67 1.63 2.51 0.44 0.49 1/2 2 0.81 0.64 0.5 1.18 1.66 3.03 1.81 2.8 0.5 0.75 5/8 3 1/4 1.06 0.77 0.63 1.5 2.04 3.76 2.32 3.56 0.63 1.47 3/4 4 3/4 1.25 0.89 0.75 1.81 2.4 4.53 2.75 4.15 0.81 2.52 7/8 6 1/2 1.44 1.02 0.88 2.1 2.86 5.33 3.2 4.82 0.97 3.85 1 8 1/2 1.69 1.15 1 2.38 3.24 5.94 3.69 5.39 1 5.55 1 1/8 9 1/2 1.81 1.25 1.13 2.68 3.61 6.78 4.07 5.9 1.25 7.6 1 1/4 12 2.03 1.4 1.25 3 3.97 7.5 4.53 6.69 1.38 10.81 1 3/8 13 1/2 2.25 1.53 1.38 3.31 4.43 8.28 5.01 7.21 1.5 13.75 1 1/2 17 2.38 1.66 1.5 3.62 4.87 9.05 5.38 7.73 1.62 18.5 1 3/4 25 2.88 2.04 1.75 4.19 5.82 10.97 6.38 9.33 2.12 31.4 2 35 3.25 2.3 2.1 5 6.82 12.74 7.25 10.41 2.36 46.75 2 1/2 55 4.12 2.8 2.63 5.68 8.07 14.85 9.38 13.58 2.63 85 3 85 5 3.25 3 6.5 8.56 16.87 11 15.13 3.5 124.25	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	■ Similar Name ■ Main Specification
	■ Size Table

Similar Name

US Type Screw Pin Chain Shackles G-2150

US Type Bolt Chain Shackle G-2150

US Type Straight Shackle G-2150


US Type High Strength Shackle G-2150

US Type Alloy Steel Shackle G-2150

Main Specification

- U type body and a lateral pin.
- Drop Forged
- 45# Steel and 40Cr Steel
- Used in lifting or fasten cargo or machinery purpose.

Size Table

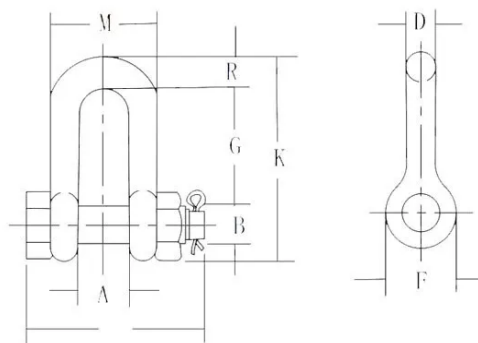

Nominal Size(in)	WLL (Tons)	Dimension(in)									Weight(lbs)
		A	B	D	F	G	K	M	P	R	G-2150
1/4	1/2	0.47	0.31	0.25	0.62	0.91	1.59	0.97	1.56	0.25	0.13
5/16	3/4	0.53	0.38	0.31	0.75	1.07	1.91	1.15	1.82	0.31	0.23
3/8	1	0.66	0.44	0.38	0.92	1.28	2.31	1.42	2.17	0.38	0.33
7/16	1 1/2	0.75	0.5	0.44	1.06	1.48	2.67	1.63	2.51	0.44	0.49
1/2	2	0.81	0.64	0.5	1.18	1.66	3.03	1.81	2.8	0.5	0.75
5/8	3 1/4	1.06	0.77	0.63	1.5	2.04	3.76	2.32	3.56	0.63	1.47
3/4	4 3/4	1.25	0.89	0.75	1.81	2.4	4.53	2.75	4.15	0.81	2.52
7/8	6 1/2	1.44	1.02	0.88	2.1	2.86	5.33	3.2	4.82	0.97	3.85
1	8 1/2	1.69	1.15	1	2.38	3.24	5.94	3.69	5.39	1	5.55
1 1/8	9 1/2	1.81	1.25	1.13	2.68	3.61	6.78	4.07	5.9	1.25	7.6
1 1/4	12	2.03	1.4	1.25	3	3.97	7.5	4.53	6.69	1.38	10.81
1 3/8	13 1/2	2.25	1.53	1.38	3.31	4.43	8.28	5.01	7.21	1.5	13.75
1 1/2	17	2.38	1.66	1.5	3.62	4.87	9.05	5.38	7.73	1.62	18.5

1 3/4	25	2.88	2.04	1.75	4.19	5.82	10.97	6.38	9.33	2.12	31.4
2	35	3.25	2.3	2.1	5	6.82	12.74	7.25	10.41	2.36	46.75
2 1/2	55	4.12	2.8	2.63	5.68	8.07	14.85	9.38	13.58	2.63	85
3	85	5	3.25	3	6.5	8.56	16.87	11	15.13	3.5	124.25