


KCG TYPE GEAR OIL PUMP

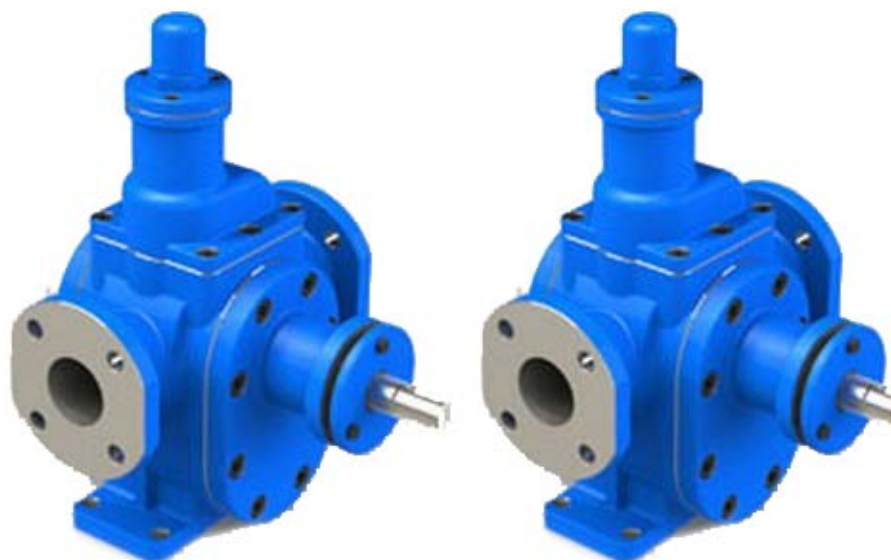

Main Specification

KCG Type Gear Oil Pump include safety valve, and this pump used to delivery non-corrosive lubricating oil or similar liquid without Particle and fibers.

Type	Caliber	Capacity		Discharge pressure	Vacuum Degree	Temperature	Motor Power
	mm	L/min	M3/h	Mpa	M	oC	Kw
KCG-1/0.6	25	16.5	1	0.6	5	250	1.5
KCG-1.5/0.6	25	25	1.5	0.6	5	250	1.5
KCG-2/0.6	25	33.3	2	0.6	5	250	2.2
KCG-3/0.6	25	55	3	0.6	5	250	2.2
KCG-5/0.6	40	83	5	0.6	5	250	3
KCG-6/0.6	40	100	6	0.6	5	250	3
KCG-7.5/0.6	50	125	7.5	0.6	5	250	4
KCG-10/0.6	50	165	10	0.6	5	250	5.5
KCG-12/0.6	55	200	12	0.6	5	250	5.5
KCG-15/0.6	55	250	15	0.6	5	250	5.5
KCG-18/0.6	55	300	18	0.6	5	250	5.5
KCG-38/0.6	100	633	38	0.6	5	250	15
KCG-38/1.0	100	633	38	1	3	250	22
KCG-58/0.6	100	633	58	0.6	5	250	18.5
KCG-58/1.0	100	633	58	1	3	250	30