


◆SM/SMB型水润滑艉轴密封装置

SM/SMB water lubrication stern shaft sealing apparatus

船舶轴系产品 Marine Shafting Products

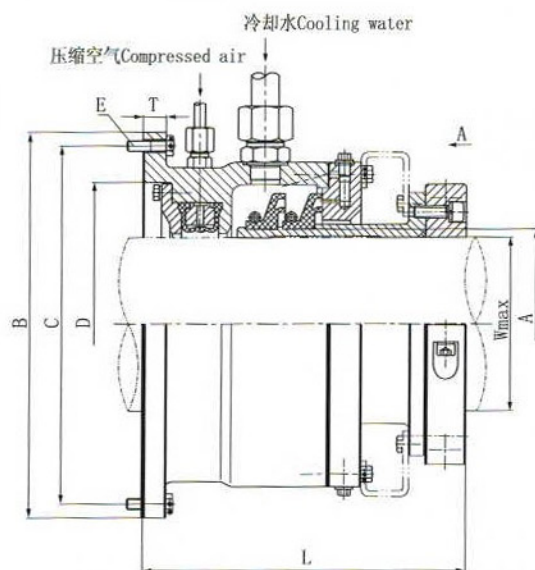


标注示例:

衬套外径为Φ350mm, 型号为SM-350



压缩空气Compressed air 冷却水Cooling water

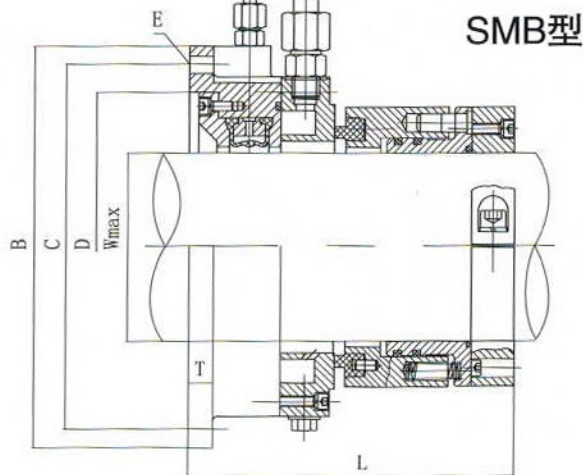

说明:

适用于以水为润滑介质的各类型船舶。

轴向串动≤1mm时, 可选用SM型;

轴向串动≤±3mm时, 及转速较高时可选用SMB型。

Remarks:

It is suitable for kinds of vessels whose working medium is water.

When the axial vibration≤1mm,the SM type can be used;

When the axial vibration≤±3mm and the speed is high,the SMB type can be used.

技术参数

Technical parameters

规格 Specifications	尺寸 Size	70	90	110	130	150	170	190	210	230	250	270	290	310	330	350	370	390	410	430	450	470	510	530	550	570	600
A		70	90	110	130	150	170	190	210	230	250	270	290	310	330	350	370	390	410	430	450	470	510	530	550	570	600
Wmax		55	75	95	115	135	155	175	195	215	230	250	270	290	310	325	345	365	385	405	425	445	485	500	520	540	570
B		250	265	285	300	330	370	380	420	440	460	480	530	540	540	590	620	640	670	690	710	730	770	790	810	830	860
C		225	240	260	260	280	330	345	385	405	425	445	475	495	500	550	570	590	615	635	675	695	715	740	760	780	810
D		165	180	195	215	235	255	240	305	325	345	365	385	405	425	445	465	485	515	535	555	575	615	640	660	680	710
E		8	8	8	8	8	8	8	8	8	8	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
T		20	20	20	20	20	25	30	25	25	25	25	25	25	25	25	25	25	30	30	30	30	30	30	30	30	30

注: 本表中尺寸仅供参考, 本产品可根据用户给定尺寸设计制造。

Note: The sizes of this table are for reference only. The product can be manufactured according to customers' request.